

# Electric Lifting LED TV

147 Inch

LTV-1.25/LTV-1.53/LTV-1.86/LTV-2.0/LTV-2.5




## KEY FEATURES

- ◆ Special Surface Treating.
- ◆ Durable and Reliable.
- ◆ Cost Effective Solution.
- ◆ Excellent and consistent picture quality.







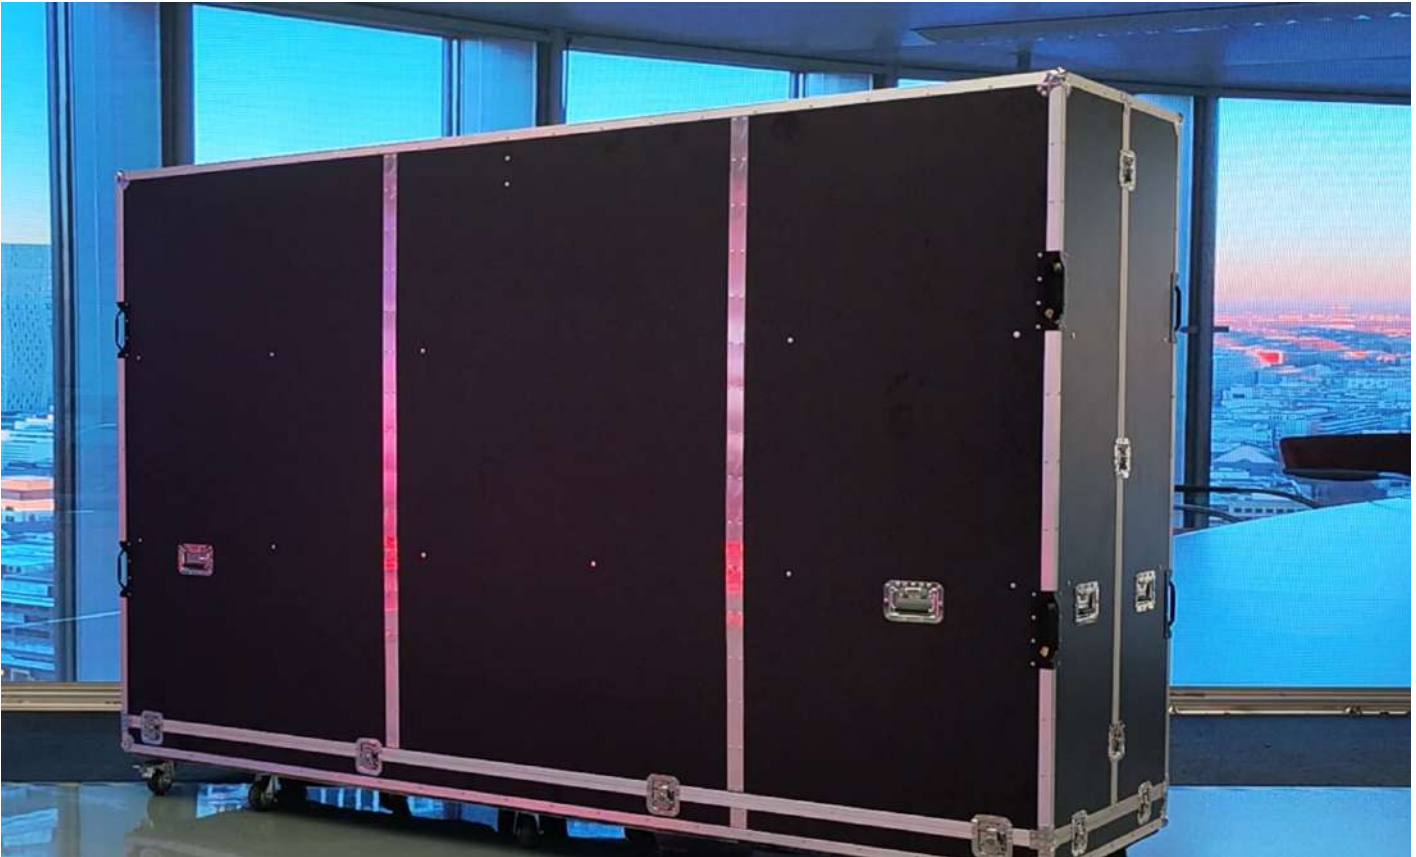



147 inch Lifting LED TV Air box

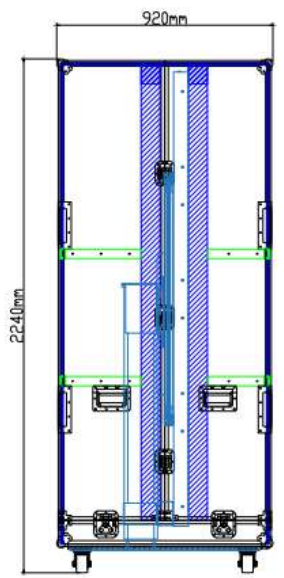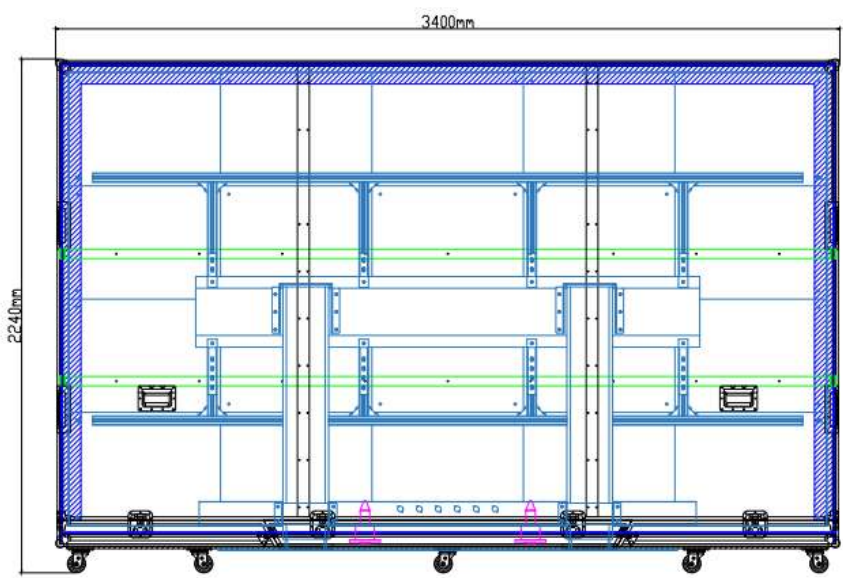

# SPECIFICATIONS



Item	LTV-1.25	LTV-1.53	LTV-1.86	LTV-2.0	LTV-2.5
LED configuration	SMD	SMD	SMD	SMD	SMD
Pixel pitch (mm)	1.25	1.53	1.86	2.0	2.5
Resolution ( W×H )	2560x1536	2080x1248	1720x1032	1600x960	1280x768
Display size ( W×H, mm)	3200x1920mm 147inch				
Packing size ( W×H×D, mm)	3400 x 2240 x 920 mm				
Weight(kg)	350				
Pixel density (Point/m <sup>2</sup> )	640000	422500	288906	250000	160000
Surface Flatness(mm)	≤0.3				
Brightness (nits)	600	600	600	800	900/2000
Color temperature ( K )	3200—10000 Adjustable				
Viewing angle (H/V) °	160/140				
Deviation of LED luminance Center (after calibration)	<3%				
Brightness Uniformity (after calibration)	≥97%				
Chromaticity Uniformity (after calibration)	±0.003Cx,Cy within				
Contrast ratio	2000:1				
Power consumption (max) W/m <sup>2</sup>	2600	2600	2500	2400	2400
Input Voltage(V)	AC100~240V ( 50-60Hz )				
Drive Mode	Constant Current Drive				
Refresh rate @60Hz	3840	3840	3840	3840	3840
Frame rate Processing ( Hz )	50&60				
Lifetime(hrs)	100,000				
Operating temperature ( °C )	-20~40				
Storage temperature ( °C )	-30~60				
Operating humidity ( RH )	10~80%				
Storage humidity ( RH )	10~85%				



info@v-studio.co

Tel: +966 12 206 8155  
54 993 3387