



Portable Battery Charged Digital Signage

32" 43" 55"

Smart Outdoor Signage

Inheriting the exquisite craftsmanship and advanced special effects of this product series, the appearance design is more beautiful, the piano paint is matched with the wire drawing process, the ultra-thin frame, and Seven new colors are added.

Only willing to create a new visual impact for the business.



**IP65
24/7 use**



**14 hours long
working time**



**1500 Nits
high brightness**



**Front
protection**



Plug and Play

NEW FEATURES



Front stereo



**Interfaces
are hidden**



**Mobile APP
control**



**Built-in GPS
anti-theft
(optional)**



**Touch
function
(optional)**

More configurations are available: high brightness/low brightness, indoor/outdoor, built-in battery/no battery

Portable ad player (chargeable)

IP65 Waterproof

The outer casing has an IP65 rating which means it keeps out all airborne swarf, dust, and other particles and is protected from any wet weather conditions, broadening the range of possible environments.



Protection from the weather



Built-in GPS, Anti-theft Enhancement

The hardware system has built-in GPS, support remote sound recording, which is convenient to lock the device and easily retrieve it when necessary.



GPS

Long Running Time

The lithium-ion battery revolutionizes the way you can use digital signage. This commercial grade slimline battery solution gives you over 14 hours running time. (environment < 0°, the running time will decrease)



14 Hours

Charge level indicator

This handy indication meter tells you exactly how much charge you have left in your battery for ultimate convenience




1500 Nits Brightness IPS Panel (Option 700Nits)

The high brightness LCD panel used in this display is up to three times brighter than a domestic Signage making it ideal for outdoor spaces.



IPS



1500 Nits

Stylish Robust Enclosure with seven colors

Seven colors aluminium alloy frame, high-strength metal housing, and front tempered glass panel, provide a solid backing and guarantee for display operation environment and service life.




Tempered Glass Front



Portable ad player (chargeable)

Various Control Methods

The new design supports mobile APP, USB stick, Ethernet and internet cloud control, allowing you to control the video content with one click.

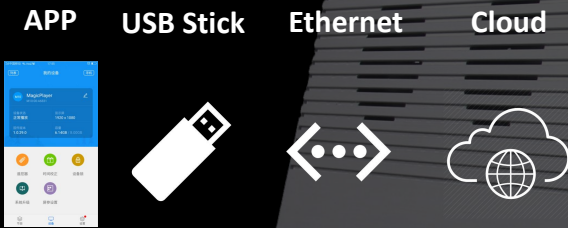


Secure Locking Bar

Advanced locking mechanism for simpler operation, ensuring the stability and safety of the display.



Front Stereo Speakers

The new design puts the speaker on the front, which greatly improves the sound effect, and uses the metal wire drawing process, with the piano lacquer, which is not only beautiful but also waterproof.

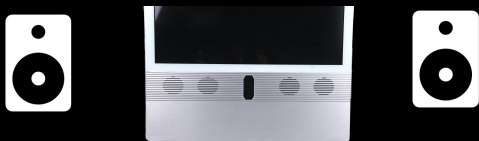

All interfaces are hidden

The new design hides all the interfaces, which greatly improves the aesthetics and is more convenient to use



- USB x 2
- LAN x 1
- Wi-Fi x 1
- POWER x 1
- 4G/5G (option)

Store Offer Show

Live Video Show

Exhibition

Outdoor Welcome Signage

Temporary Activities



Portable ad player (chargeable)



Parameter

| Item | Sub Item | 55" Smart TFT-LCD |
|-----------------------|---------------------------------|---|
| Panel | Display Model | BOE IPS High TN1 105 °C |
| | Resolutions | 1920x1080 (FHD) |
| | Display Area(mm) | 1209(H) x 683(W) |
| | Aspect Ratio | 9:16 |
| | Brightness (cd/m ²) | 1500 |
| | Colour | 16.7M |
| | Viewing Angle | 178° |
| | Contrast Ratio | 4000:1 |
| | Touch Function | optional function |
| | Formats | Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA) , Image (JPG, GIF, BMP, PNG) |
| Computer | Resolution | 1080x1920 (Downward compatibility) |
| | CPU | RK3288, Quad core CPU Frequency: 1.8GHZ |
| | GPU | Mali-T764 GPU MP4 Quad core GPU Support OpenGL ES1.1/2.0,OpenVG1.1,OpenCL |
| | RAM | DDR3, 2GB |
| | ROM | 16GB |
| | USD | USB2.0 HOST(x2) |
| | LAN | 10/100M Ethernet |
| | WiFi | 802.11b/g/n |
| | OS | Android7.1.2 |
| | Content control method | Wi-Fi APP, U disk, Ethernet, Cloud |
| Speaker Specification | 8Ω 12W x2 | |
| Battery | GPS | Optional Features |
| | Battery Technology | CATL Ternary lithium blade battery |
| | Charging Time | 7 hours |
| | Working Time | 10-12 hours (When the temperature is lower than 0 degrees, the running time will reduce by 10% for every 5 degrees drop) |
| | Batter Capacity | 5000mAh |
| | Power Supply | 24V |
| Mechanical | Power Consumption | 110W |
| | Energy | 2016Wh |
| | Outside Color | 7 colors available |
| | Unit Size (WxHxD mm) | 1407x760x180.5 |
| | Package Size(WxHxD mm) | 1540x270x860 |
| Environmental | Net Weight (Kg) | 64.7 |
| | Gross Weight(Kg) | 71 |
| | Operating Tempeaure | -20 °C to 70 °C (when the battery is charged 0 °C to 45 °C) |
| | Storage Temperature | -30 °C to 80 °C (battery recommended long-term strage temperature -20 °C to 25 °C) |
| Accessories | Operation Humidity | 10% to 80% |
| | Storage Humidity | 5% to 95% |
| Warranty | GPS and wheel lock | Accurate positioning and voice recording (Optional Features) |
| | Included | Remote Contol, User Manual, Charger, Power Cable |
| | Warranty Period | 1 Year Warranty |
| Warranty | Warranty Period (Battery) | 1 Year Warrenty |
| | Technical Support | Lifetime |

